

FANUC Robot **ARC Mate 100iD**

FANUC Robot **ARC Mate 120iD**

FEATURES

FANUC Robot ARC Mate 100iD / 120iD is the cables integrated arc welding robot with an enhanced dress-out ability.

- The robot is available to meet a variety of operating spaces.
- The unique gear drive mechanism realizes the slim arm of the torch cable integrated robot.
- Welding cable utilities backside the wire feeder can be integrated in the enlarged J1 hollow tube. It makes system setup easy.
- Not only the torch cable but also the sensor cable can be integrated in the J3 arm due to the enlarged J4 and J6 hollow tubes. The wire feeder can be compactly mounted backside of the J3 arm.
- Higher rigidity of the arm provides high speed and high accuracy of the robot motion. It can enhance the productivity of the system.
- Off-line teaching by ROBOGUIDE (Option) reduces touch-up cost.
- Various intelligent functions with *i*RVision (integrated vision) and coordinated motion with the positioner are available.



Application Examples




Automotive part welding




Stainless part welding

Operating space

ARC Mate 100iD, /10L, /8L

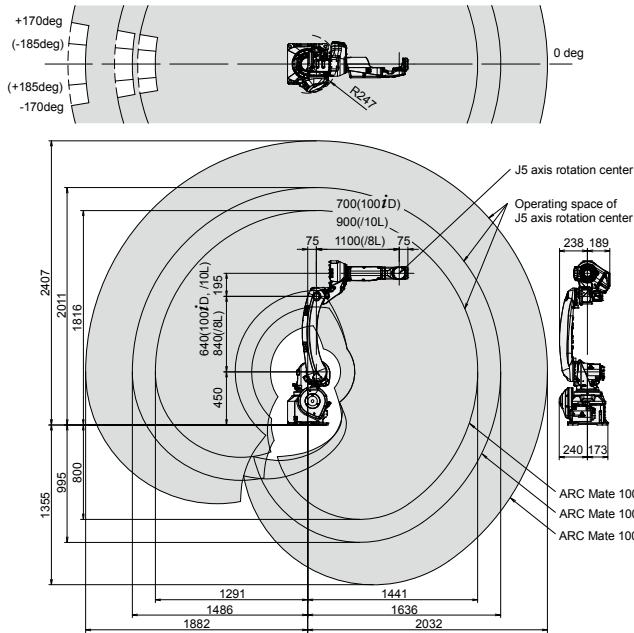

ARC Mate 120iD, /12L

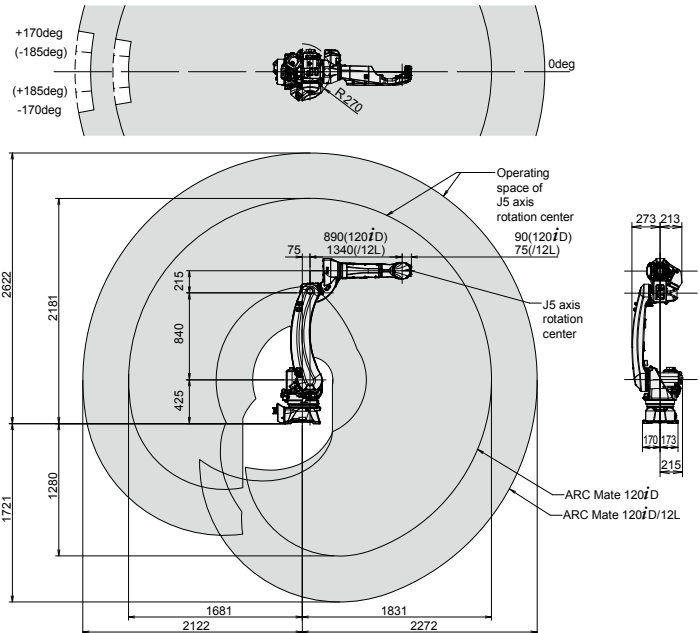

Specifications

Model		ARC Mate 100iD	ARC Mate 100iD/10L	ARC Mate 100iD/8L	ARC Mate 120iD	ARC Mate 120iD/12L
Type		6 axes(J1,J2,J3,J4,J5,J6)				
Reach		1441 mm	1636 mm	2032 mm	1831 mm	2272 mm
Installation		Floor, Upside-down, Angle mount * Floor, Upside-down for 4 brake type	Floor, Upside-down, Angle mount			
Motion range (Maximum speed) Note 1, 2)	J1 axis rotation	340° / 370°(Option)(260°/s) 5.93 rad / 6.46 rad(Option)(4.54 rad/s)		340° / 370°(Option)(210°/s) 5.93 rad / 6.46 rad(Option)(3.67 rad/s)		
	J2 axis rotation	235° (240°/s) 4.10 rad (4.19 rad/s)		235° (210°/s) 4.10 rad (3.67 rad/s)	260° (210°/s) 4.54 rad (3.67 rad/s)	
	J3 axis rotation	455° (260°/s) 7.94 rad (4.54 rad/s)		455° (220°/s) 7.94 rad (3.84 rad/s)	458° (265°/s) 8.00 rad (4.63 rad/s)	
	J4 axis wrist rotation	380° (430°/s) 6.63 rad (7.50 rad/s)			400° (420°/s) 6.98 rad (7.33 rad/s)	
	J5 axis wrist swing	360° (450°/s) 6.28 rad (7.85 rad/s)			360° (420°/s) 6.28 rad (7.33 rad/s)	360° (450°/s) 6.28 rad (7.85 rad/s)
	J6 axis wrist rotation	900° (720°/s) 15.71 rad (12.57 rad/s)				
Max load capacity at wrist		12 kg	10 kg	8 kg	25 kg	12 kg
Allowable load moment at wrist	J4 axis	26.0 N·m	22.0 N·m	16.1 N·m	52.0 N·m	22.0 N·m
	J5 axis	26.0 N·m	22.0 N·m	16.1 N·m	52.0 N·m	22.0 N·m
	J6 axis	11.0 N·m	9.8 N·m	5.9 N·m	32.0 N·m	9.8 N·m
Allowable load inertia at wrist	J4 axis	0.90 kg·m ²	0.65 kg·m ²	0.63 kg·m ²	2.40 kg·m ²	0.65 kg·m ²
	J5 axis	0.90 kg·m ²	0.65 kg·m ²	0.63 kg·m ²	2.40 kg·m ²	0.65 kg·m ²
	J6 axis	0.30 kg·m ²	0.17 kg·m ²	0.061 kg·m ²	1.20 kg·m ²	0.17 kg·m ²
Repeatability Note 3)		± 0.02 mm	± 0.03 mm		± 0.02 mm	± 0.03 mm
Mass Note 4)		145 kg	150 kg	180 kg	250 kg	
Installation environment		Ambient temperature : 0 to 45°C				
		Ambient humidity : Normally 75%RH or less (No dew nor frost allowed), Short term 95%RH or less (within one month)				
		Vibration acceleration : 4.9m/s ² (0.5G) or less				

Note 1) In case of angle mounting, J1 and J2 axis motion range are restricted.

Note 2) During short distance motions, the axis speed may not reach the maximum value stated.

Note 3) Compliant with ISO9283.

Note 4) Without controller.

FANUC CORPORATION

Headquarters Oshino-mura, Yamanashi 401-0597, Japan

Phone: 81-555-84-5555 Fax: 81-555-84-5512 <https://www.fanuc.co.jp>

●Overseas Affiliated Companies
FANUC America Corporation
FANUC Europe Corporation, S.A.
SHANGHAI-FANUC Robotics CO., LTD.
KOREA FANUC CORPORATION
TAIWAN FANUC CORPORATION
FANUC INDIA PRIVATE LIMITED
FANUC SINGAPORE PTE. LTD.
FANUC THAI LIMITED
FANUC MECHATRONICS (MALAYSIA) SDN. BHD.

PT. FANUC INDONESIA
FANUC OCEANIA PTY. LIMITED
FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

3900 West Hamlin Road, Rochester Hills, MI 48309-3253, U.S.A.
7, rue Benedikt Zender, L-6468 Echternach, Grand-Duché de Luxembourg
No. 1500 Fuliang Road, Baoshan Area, Shanghai, China
101, Wanam-ro(st), Seongsang-gu, Changwon-si, Gyeongsangnam-do, 642-290 Republic of Korea
No.10, 16th Road, Taichung Industrial Park, Taichung, Taiwan
41-A, Electronics City, Bangalore, 560 100, India
No.1 Teban Gardens Crescent, Singapore 608919, Singapore
1301 Pattanakarn Road, Kwaeng Suanluang, Khet Suanluang, Bangkok 10250 Thailand
No.32, Jalan Pengacara U1/48, Temasya Industrial Park, Section U1, Glenmarie, 40150 Shah Alam, Selangor Darul Ehsan, Malaysia
JL Boulevard Bukit Gading Raya Blok R, Jakarta 14240 Indonesia
10 Healey Circuit, Huntingwood, NSW 2148, Australia
17 Loper Ave, Aeroport Industrial Estds, Spartan Ext.2 P.O.Box 219, Isando 1600, Republic of South Africa

Phone: 1-248-377-7000
Phone: 352-727777-1
Phone: 86-21-5032-7700
Phone: 82-55-278-1200
Phone: 886-4-2359-0522
Phone: 91-80-2852-0057
Phone: 65-6567-8566
Phone: 66-2-714-6111

Fax: 1-855-774-7051
Fax: 352-727777-403
Fax: 86-21-5032-7711
Fax: 82-55-284-9826
Fax: 886-4-2359-0771
Fax: 91-80-2852-0051
Fax: 65-6566-5937
Fax: 66-2-714-6120

Phone: 60-3-7628-0110
Phone: 62-21-4584-7285
Phone: 61-2-8822-4600
Phone: 27-11-392-3610

Fax: 60-3-7628-0220
Fax: 62-21-4584-7288
Fax: 61-2-8822-4666
Fax: 27-11-392-3615

●All specifications are subject to change without notice.
●No part of this catalog may be reproduced in any form.
●The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.

© FANUC CORPORATION, 2016

ARC Mate 100iD(E)-06, 2019.12, Printed in Japan